


IN THE BOX:

- Keychron K2 Bluetooth Mechanical Keyboard x 1
Type-C Cable * 1
Package * 1
User Guide * 1


K2 Bluetooth Mechanical Keyboard Specifications

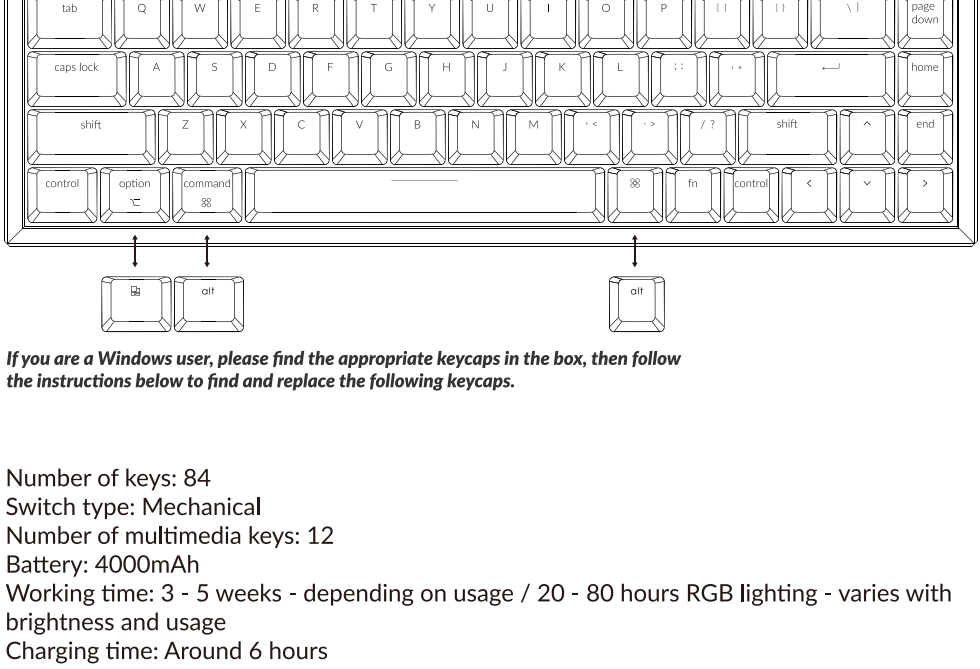

If you are a Windows user, please find the appropriate keys in the box, then follow the instructions below to find and replace the following keys:

- Number of keys: 84
Switch type: Mechanical
Number of multimedia keys: 12
Battery: 4000mAh
Working time: 3 ~ 5 weeks - depending on usage / 20 ~ 80 hours RGB lighting - varies with brightness and usage
Charging time: Around 6 hours
Charging port: USB Type-C
Mode: Bluetooth/Wired
Bluetooth operating distance: Within 10 meters (open space)
Name of Bluetooth device: Keychron K2
Size: 313 x 123 x 38.5mm / 317 x 129 x 38.5mm
Weight: 678g / 808g
Operating Environment: -10 to 50°C
Technical specifications can be subjected to change without notice, we apologize for any inconvenience caused.

K2 Bluetooth Mechanical Keyboard Overview

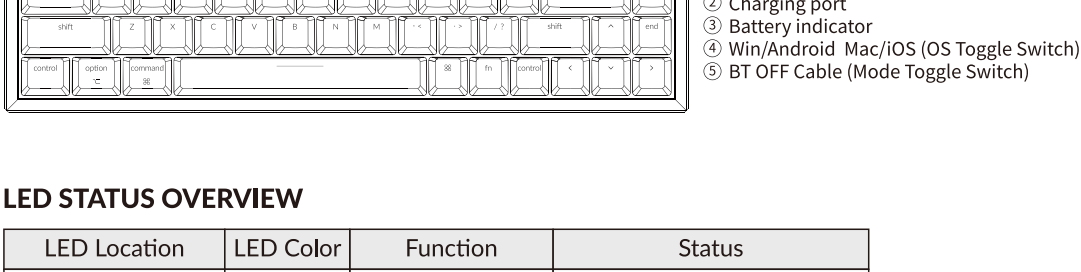

LED STATUS OVERVIEW

LED Location	LED Color	Function	Status
Battery indicator	Red	Charging	Low battery - blinking Charging - Static Fully charged - Light off
Bluetooth indicator	Blue	Bluetooth	Pairing - fast blinking Paired - light off Switching - slow blinking

FUNCTION DESCRIPTION:

CHARGING

Plug the cable into a USB port and plug the other end into the keyboard port. Charging Indicator: When the battery level is below 15%, the indicator will show red blinking light. A red light will stay on while charging; The red light will stay on while charging and it goes off after 4 hours when keyboard is fully charged.
** The Keychron keyboard is compatible with all USB ports. Please use a 5V 1A adapter and USB 2.0 or 3.0 for the best performance. The Keychron K2 can be charged in Bluetooth/on/off mode.
** This product supports up to 5V charging voltage and 1A charging current. We are not responsible for any problems caused by improper charging.

BLUETOOTH/WIRED MODE (TOGGLE SWITCH)

WIRED MODE

1. Switch the toggle switch to Cable option (it only works when a USB cable is plugged in).
 2. Connect our cable with your PC and keyboard.
 3. Colorful backlit on.
- *Under Wired Mode, keyboard will not enter into Battery Saver Mode.

BLUETOOTH MODE

1. Switch the keyboard to Bluetooth option.
 2. Colorful backlit On.
 3. Hold "Fn+1" key for 3 seconds to activate Bluetooth pairing (the Bluetooth indicator fast flashes for 3 minutes to detect pairing. Notes: the Bluetooth indicators are located under these keys - "1", "2", "3").
 4. Search for the Bluetooth device "Keychron K2" on your device and connect it (the Bluetooth indicator goes off after successful pairing).
- Note: This keyboard supports pairing up to 3 devices simultaneously via combination key "fn" + "1" / "fn" + "2" / "fn" + "3". Simply short press combination keys "fn" + "2" / "fn" + "3" to switch. Follow the above procedures to connect with other devices.
*The Bluetooth indicator will continue to flash for 3 minutes.
**Slow or failed connections may exist due to different Bluetooth versions, please make sure all the settings are correct.

SWITCH BLUETOOTH DEVICES

Short press combination key "fn" + "1" / "fn" + "2" / "fn" + "3" to switch to other device.

Reconnect:

1. Switch the keyboard to the Bluetooth option to activate the keyboard (the keyboard will connect to the last connected device by default).
 2. The Bluetooth indicator flashes for 3 seconds and automatically pairs with the last paired device.
 3. If the Bluetooth indicator is off, press any button to enter the connection again.
- * The keyboard must have been paired with the device to perform this function.

Turn off the Keyboard

Switch to "Off"

BATTERY SAVER

Under Bluetooth mode, the keyboard backlight turns off when it is inactive for 10 minutes. Tap any button to wake the keyboard. If want to disable this auto battery save mode, press Fn+S+O for 4 seconds. Then if want to enter this power save mode again, press Fn+S+O for 4 seconds.

BACKLIT SETTING

- Short press [] to switch between different types of lighting effects.
- When backlit is on, press [] button to switch among them. Short press fn and "left arrow" or fn and "right arrow" to adjust light colors. (For RGB version only)

OS SWITCH

1- MAC/iOS

Turn the switch to Mac/iOS when you are connected to a Mac or iOS operating system.

To use multimedia keys, simply press F1 to F12.

2-WINDOWS/ANDROID

Switch the toggle to Windows/Android when the keyboard is connected to a Windows or Android operating system. To use multimedia keys, simply press "fn" and F1 to F12.

*When using the Windows/Android mode, [] keys are used for "Windows" and "Alt" functions.

3-INPUT METHOD SWITCH

For iOS:

Input method switch: Ctrl + Space
Caps Lock: Caps (Enable General>Keyboards>Hardware Keyboard>Caps Lock Language Switch)

For Android:

Input method switch: Shift + Space

NOTE: Functions of certain multimedia key may be disabled due to compatibility, versions, brands and drivers of Windows/Android OS. We also recommend not to switch OS frequently as it may impact keyboard operations.

MULTIMEDIA FUNCTION

Press **fn+X** simultaneously for 4 seconds to switch the function between the F1–F12 function keys and the multimedia keys, then, you need to press the **fn** key to use the F1–F12 function. (Notes: **fn+X** function only works in Windows OS, this doesn't apply to MacOS and other operating systems.)

TROUBLESHOOTING

If unable to pair keyboard to device, confirm that the device you're trying to pair with is Bluetooth-capable. If so, restart the device and try pairing it with the keyboard again.

Note: On a Windows computer, a new Bluetooth connection will sometimes require additional software updates—a process that may still be ongoing after a message appears indicating a successful connection.

[1] In macOS, multimedia keys have been set as default, simply press fn+function key to use the function of F1~F12. In Windows OS, the function of F1~F12 have been set as default, simply press F1~F12 key to use the function of F1~F12, press fn+function key for the multimedia keys function.

Press fn+X+L simultaneously for 4 seconds to switch the function between the F1~F12 function and the multimedia keys, then, you need to press the fn key to use F1~F12 function. (Notes: fn+X+L function only works in Widows OS, this doesn't apply to MacOS and other operating systems.)

TROUBLESHOOTING

If unable to pair keyboard to device, confirm that the device you're trying to pair with is Bluetooth-capable. If so, restart the device and try pairing it with the keyboard again.

Note: On a Windows computer, a new Bluetooth connection will sometimes require additional software updates—a process that may still be ongoing after a message appears indicating a successful completion. Wait at least 20 minutes after pairing to make sure all updates are completed before restarting the computer.

Confirm that the device is configured to accept Bluetooth connections (Windows) and supports an external keyboard (HID profile).

Go to Bluetooth Devices > Open Settings and select the following:

Allow Bluetooth devices to find this computer
Allow Bluetooth devices to connect to this computer
Alert me when a Bluetooth device wants to connect

My keyboard isn't working.

For the keyboard: Turn the keyboard off and back on.
Turn Bluetooth off and restart the computer. (Windows)
For the device:
Go to Bluetooth settings and turn off Bluetooth and "forget" the keyboard.
Restart the device and turn on Bluetooth to reconnect.

Bluetooth connection is interrupted even within 10 meter.

Check if the keyboard is resting on a metal surface that can interfere with the Bluetooth signal.

Third party input tools are not compatible with the keyboard.

Due to compatibility, versions, brands and drivers of Windows/Android OS, functions of third party input tools may be affected while using the keyboard. Please make sure your operating system and drivers are up to date.

Certain fn keys or multimedia keys does not work under Windows/Android mode.

Functions of certain multimedia keys may be disabled due to compatibility, versions, brands and drivers of Windows/Android OS.

Safety Precaution:
Keep the product, accessories and packaging parts out of reach of children to prevent any accidents and choking hazards.
Always keep the product dry to avoid corrosion.
Do not expose the product to extreme temperatures below -10°C (5°F) or above 50°C (131°F) to preserve the lifespan of the keyboard and battery.

COMPLIANCE AND SAFETY

FCC DECLARATION OF CONFORMANCE

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the distance between the equipment and receiver.
- Plug the equipment into an outlet on a circuit different from that to which the receiver is currently using.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirements. The device can be used in portable exposure condition without restriction.

Cafagan Import and Export Trading Co., Ltd

Find us at:

https://www.keychron.com

hello@keychron.com

@keychron

@keychron

Designed by Keychron

Assembled in China

Keychron

K2 蓝牙机械键盘

注意事项:

请勿将本产品、其配件和包装部件放在儿童接触到的地方，以防发生意外导致窒息。
请保持产品干燥，以免损坏。
请勿将产品暴露于 10°C (5°F) 或高于 50°C (131°F) 的极端温度下，以维持键盘或电池的使用寿命。

合规和安全

联邦通信委员会合规声明

本装置符合联邦通信委员会规则的第15部分。操作符合以下两个条件：(1) 此装置不会产生有害干扰。(2) 此装置必须接受任何接收到的干扰，包括可能导致设备或操作中的干扰。
未经合规局允许明确批准的任何变更或修改可能会使用户无权操作该装置。

注意：根据联邦通信委员会规则的第15部分，本装置已经过测试，符合第二类数字装置的限制。这些限制旨在提供合理的保护，防止住宅环境中的有害干扰。本装置会产生无线电频率，如果不用则应进行安装和使用，可能会对无线电通信造成有害干扰。

但是，无法保证在特定安装中不会发生干扰。如果此装置确实对无线电或电视接收产生有害干扰(可通过关闭和打开装置来确定)，建议用户尝试通过以下一种或多种措施纠正干扰：

- 重新调整或更换接收天线。
- 增加设备和接收器之间的距离。
- 将设备连接到与接收器连接的电路不同的电路插座上。
- 咨询经销商或有经验的无线电/电视技术人员寻求帮助。

装置已经过评估，符合一般无线电频率输出要求。该装置可以在便携式情况下使用，不受限制。


内容清单

- Keychron K2 蓝牙机械键盘 x 1
USB线 x 1
按键帽 x 1
螺丝帽 x 3
说明书 x 1
包装 x 1

K2 键盘规格

- 按键: 84键
轴: 机械轴
多媒体键数: 12
电池: 4000mAh
工作时间: 3 ~ 5周 - 根据使用情况 / 20 ~ 80小时RGB照明 - 随亮度和使用情况而变化
充电时间: 约5.5小时
充电接口: USB Type-C
模式: 蓝牙 / 有线
蓝牙工作距离: 最长10米 (开放空间)
蓝牙设备名称: Keychron K2
尺寸: 313 x 123 x 38.5mm / 317 x 129 x 38.5mm
重量: 678g / 808g

K2 键盘图示

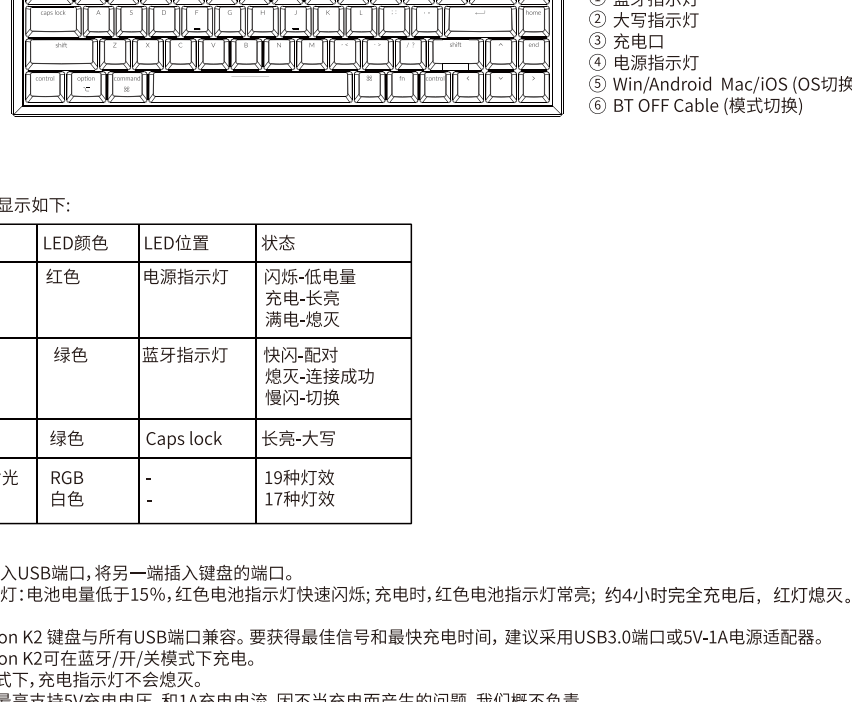

功能说明

LED状态显示如下:

功能	LED颜色	LED位置	状态
充电	红色	电源指示灯	闪烁-低电量 常亮-电量 满电-熄灭
蓝牙	绿色	蓝牙指示灯	快闪-配对 慢闪-配对成功 慢闪-切换
大写	绿色	Caps lock	长亮-大写
键盘背光	RGB 白色	-	19种灯效 17种灯效

充电

将数据线插入USB端口，将另一端插入键盘的端口。
充电指示灯: 当电量低于15%时，红色电源指示灯快速闪烁; 充电时，红色电源指示灯常亮; 约4小时完全充电后，红灯熄灭。

* Keychron K2 键盘与所有USB端口兼容。要获得最佳信号和最快充电时间，建议使用USB3.0端口或5V-1A电源适配器。

* Keychron K2 可在蓝牙/开关模式下充电。
* 有线模式下，充电指示灯不会熄灭。

* 本产品最高支持5V充电电压，和1A充电电流，因不当充电而产生的问题，我们将概不负责。

背光灯

-短按 [] 可调整17/19种背光。

-背光时，按 [] 按键可切换17/19种灯光效果。短按 [] 可调整明暗度。

前次充电后默认灯效，长按 [] 2秒恢复默认灯效。

蓝牙/有线模式

有线模式

1. 将键盘“模式切换”按钮(Cable位置(连接USB线的时候键盘无任何反应))
2. 将本产品插入USB Type-C接口，键盘即可开始充电。
3. 七秒灯效将会显示。

蓝牙模式

1. 将键盘“模式切换”按钮到BT位置。
2. 七秒灯效将会显示。
3. 长按“Fn+1”键约3秒激活蓝牙配对(蓝牙指示灯闪烁3秒)
4. 在将设备连接到蓝牙设备(配对成功或蓝牙指示灯熄灭)。

注意：此键盘支持快速配对“Fn+1”/“Fn+2”/“Fn+3”依次配对最多3台设备。长按组合键“Fn+加”/“Fn+减”进行开关，按照上述步骤连接其他设备。

* 蓝牙版本较多等原因，初次连接可能会出现连接缓慢或连接失败等问题，请耐心检查设备设置是否正确。

切换蓝牙设备

短按组合键“Fn+1”/“Fn+2”/“Fn+3”切换到其他设备。

* 切换过程可能会出现切换频率或切换速度过快，导致延迟，此时请耐心等待或重新切换。

连接

1. 将键盘“模式切换”按钮位置切换(键盘并切换到上一次连接的设备)。
2. 蓝牙指示灯闪烁3秒，自动配对上一次配对的设备。
3. 蓝牙指示灯熄灭，可再次按任意键再次进入连接状态。

* 键盘必须成功配对到设备才能实现此功能。

关闭键盘

将“模式切换”按钮至OFF，此时本产品关闭所有模式，但可以继续进行充电。

省电模式

蓝牙状态下，键盘主操作五种后自动进入休眠状态，十分钟后进入休眠状态，点击任意键即可唤醒。当电量低于20%，电源指示灯闪烁红色，请及时充电。

系统切换

1- Mac/iOS / OS
连接到Mac/iOS操作系统时，将“OS切换”按钮至Mac/iOS。如果需要使用多媒体键，请按 F1到F12多媒体功能键。F1-F12按键功能需要组合“Fn”键使用。

2-WINDOWS/安卓

当键盘连接到Windows或Android操作系统时，将“OS切换”按钮至Win / Android。如果需要使用多媒体键，请按 F1到F12多媒体功能键。F1-F12按键功能需要组合“Fn”键使用。

3-输入法切换

对于iOS:
输入法切换: Ctrl + Space
大写锁定: Caps(启用常规>键盘>硬件键盘>大写锁定打开)

对于安卓:
输入法切换: Shift + Space

注：由于Windows、安卓OS的兼容性、版本、品牌和驱动程序，某些多媒体键的功能可能不能被使用。我们还建议不要频繁切换操作系统，因为它可能会影响键盘的操作。

多媒体功能

坤常棧进出口贸易有限公司

<https://keychron.com/>

通过以下方式与我们联系:

hello@keychron.com

[🐦 @keychron](https://twitter.com/keychron)

[📷 @keychron](https://www.instagram.com/keychron)

疑难解答

无法连接键盘与我的设备。

答：请从设备附近移除所有其他蓝牙设备。
重新配对设备并尝试再次与键盘配对。
注意：在Windows系统上，新的蓝牙连接有时需要额外的驱动程序。在出现表示成功完成的消息后，该过程可能仍在进行中。配对后至少等待30秒，以确保设备在配对之前所有驱动程序都已更新。

确认装置驱动程序是否通过Windows(Windows)并支持外部设备(HID配置文件)。

特别蓝牙设备+灯设置，然后选择以下设置：

允许蓝牙设备找到这台电脑
允许蓝牙设备连接到这台电脑
当蓝牙设备连接时提醒我

我的键盘无法使用。

答：关闭并重新打开键盘。

关闭设备并重新配对(有线)。(有线)

关于音量：
特别蓝牙设备+背光和蓝牙+“静音”键。
重新配对，并打开蓝牙重新配对。

蓝牙连接或在10米内受干扰。

答：检查键盘是否放在可能干扰蓝牙信号的区域表面上。

第三方输入工具与键盘不兼容

答：由于Windows/Android系统的兼容性、版本、品牌和驱动程序，第三方输入工具在使用键盘时可能被影响。请保持你的作业系统的驱动程序为最新版本。

某些fn键或多媒体键在Windows/安卓模式下不能工作。

答：由于Windows/Android系统的兼容性、版本、品牌和驱动程序，某些多媒体键的功能可能不能被使用。

常州株进出口贸易有限公司

https://www.keychron.com

通过以下方式与我们联系:

hello@keychron.com

@keychron

@keychron

Designed by Keychron

Assembled in China