

Iser Manual




Monitor Arm OSLO - System 4

In order to achieve a correct mounting of this product, you are advised to read and follow the instructions step by step. If there are incomprehensible steps, please let us know and we will get back to you. Note! All necessary parts are found in 4 separate boxes (see last page).

Part Check-List

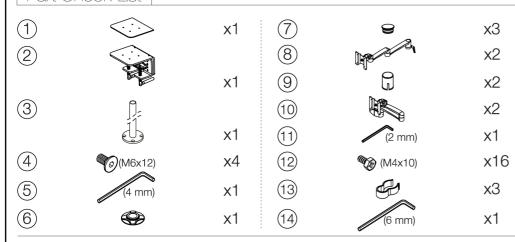

Adhere pad to the bottom side of the clamp(1). Fasten clamp(2) to the table using the handle. Mount the pole(3) on top using the screws(4) and Allen key(5). Complete assembly



4 Once the pole is fastened, attach both plastic covers (6) & (7) to the pole.


Pad thickness)

ERGO-MA15D4


black plastic surfaces; pull lever outwards until the clamp is completely loose.

Assembly Guide


2 The purpose of this step is to prepare the additional arms(8). The preparation is done by removing the black plastic clamp from the arm, as well as the black bushing. Please examine steps 1 to 4 seen below before proceeding. It will facilitate the removal process.




1 Unscrew and position the handle bolt so that the bolt only has contact with one half of the plastic clamp.



the arm with a firm grip. Use leverage to bend the lever upwards with as much force as possible. The bottom of the clamp will surface as seen in the zoomed-in illustration.



3 As the bottom part of the




A Remove the black plastic clamp and replace the old bushing with the one provided in the carton box (9). Repeat process with the second arm(8). **Tergo**werken


User Manual


3 Insert both twin monitor bracket (1) into the pole. Adjust to desired height and fix their position using the provided Allen key (5).

4 Insert the prepared monitor arms (8) from step 2. Then, attach the plastic covers (7) to cover the cavities. Once all pieces are set in place, tighten all eight small screws using the small Allen key (1). To make all joints and arms completely rigid, use Allen key (5).



5 Mount all LCD monitors to the VESA brackets with the provided screws (2) as seen below.





Assembly Guide

6 Finish installation by directing the cables from the LCD monitors through all black cable collectors. Lastly, direct the cable further down the pole and attach all cable clips (3) to keep them in place. See illustrations below.

